

MITO ALPI

ELCA
RADIOCOMANDI

Elca s.r.l.
Via del Commercio, 7/B
36065 Mussolente (VI)



TECHNICAL DATA:

Power voltage supply: 9-30 Vac/dc

Maximum capacity of the command circuit contacts: 230Vac

Protection degree AT/AR: IP67

Dimension AT: 160x116x56 mm

Dimension AR: 165x107x50 mm



Weight AT: 280g

Working temperature: -20/+55°C

Operating distance: 150m

ISM band working frequency: 868,0125-869,9875MHz

Charged battery autonomy at 20°C: approx. 50 hours

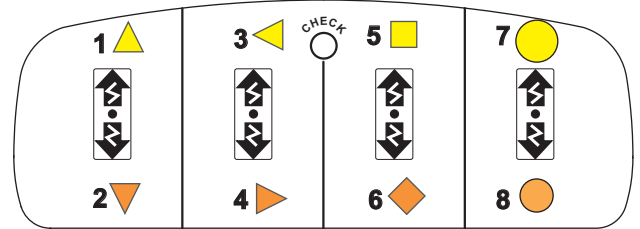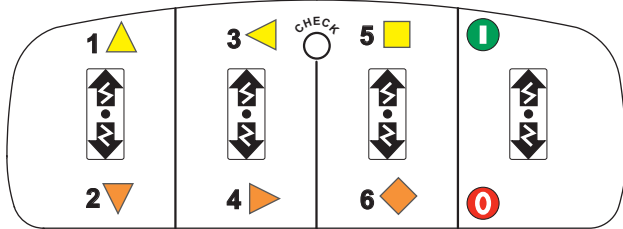

composed of 3 toggle switches (3 position spring return) plus start and stop

composed of 4 toggle switches (3 position spring return)

receiver with cableland output PG11
battery charger power unit 100-240Vac

receiver with cableland output PG11
battery charger power unit 100-240Vac

Article:

MIAL13UNXXE01

Article:

MIAL04UNXXE01

ACCESSORY:

battery charger power unit 10-33Vdc

ACCESSORY:

battery charger power unit 10-33Vdc